

Chain Link Fencing

CHAIN LINK

CHAIN LINK FENCING is a highly cost effective perimeter protection solution.

It is manufactured from wire woven into a diamond mesh pattern. The system benefits from good visibility and is perfect when working to a budget on low to medium security sites. Chain link is also a versatile solution which allows various heights, finishes and wire gauges to be specified.



chain link

specification

FENCE HEIGHT	WIRE DIAMETERS		
	GALVANISED FINISH	PVC COATED CORE BRIGHT WIRE	PVC COATED CORE GALVANISED WIRE
900mm 1200mm 1400mm 1800mm 2150mm 2400mm 2750mm 3050mm 3600mm	Wire diameters of: 2.00mm 2.50mm 3.00mm 3.55mm 5.00mm can be specified when opting for a galvanised finish.	Wire diameters of: 3.15/2.24mm 3.55/2.50mm 4.00/3.00mm can be specified when opting PVC coated bright core wire finish.	Wire diameters of: 3.15/2.24mm 3.55/2.50mm 4.00/3.00mm 4.75/3.55mm can be specified when opting a PVC coated galvanised core wire finish.

Why specify Chain Link?

- Versatile
- Good visibility
- Inexpensive
- Extensive choice
- Unobtrusive design

Common Applications:

- Budget boundaries
- Medium Security
- Schools
- Parks
- Recreational grounds

POSTS

Three post options are available:

- Steel angle section
- Steel hollow section
- Concrete posts

EDGES

Chain link fencing is normally supplied with knuckled edges. To increase the security of the fence barbed edges are also available.

SLOPING GROUND



Chain link fencing mesh flexibly follows ground contours and so can easily be installed on sloping ground.

MATCHING GATES

A comprehensive selection of single and double swing gates are available to match. Gates can be clad to match the Chain Link system.

FINISHES

The Chain Link system can be either galvanised or PVC coated. Black or green coating are standard colours but other colours are available.

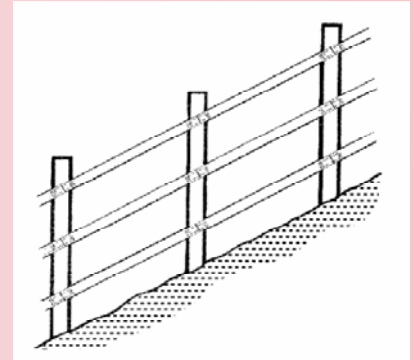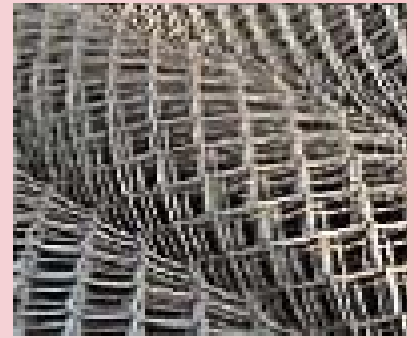

Q40 CHAIN LINK FENCING

The contractor, Darfen Durafencing will provide all labour and materials necessary for the installation of the Chain link fencing system. This will include all fixings, gates and other components required. Darfen will provide experienced installers who are qualified to complete the contract in line with quality standards of BS EN ISO 9001: 2000. The fence shall be metres high with a wire diameter ofmm, and in a finish of The post type will be and will be concreted into the ground in conformance with BS 1722.

www.darfen.co.uk

Northern- 0808 208 3891 North West- 0808 208 3892 Scottish- 0808 208 3893
Central- 0808 208 3894 North London- 0808 2083895